


中継コネクタ(UMP70)外形図


TOSHIBA

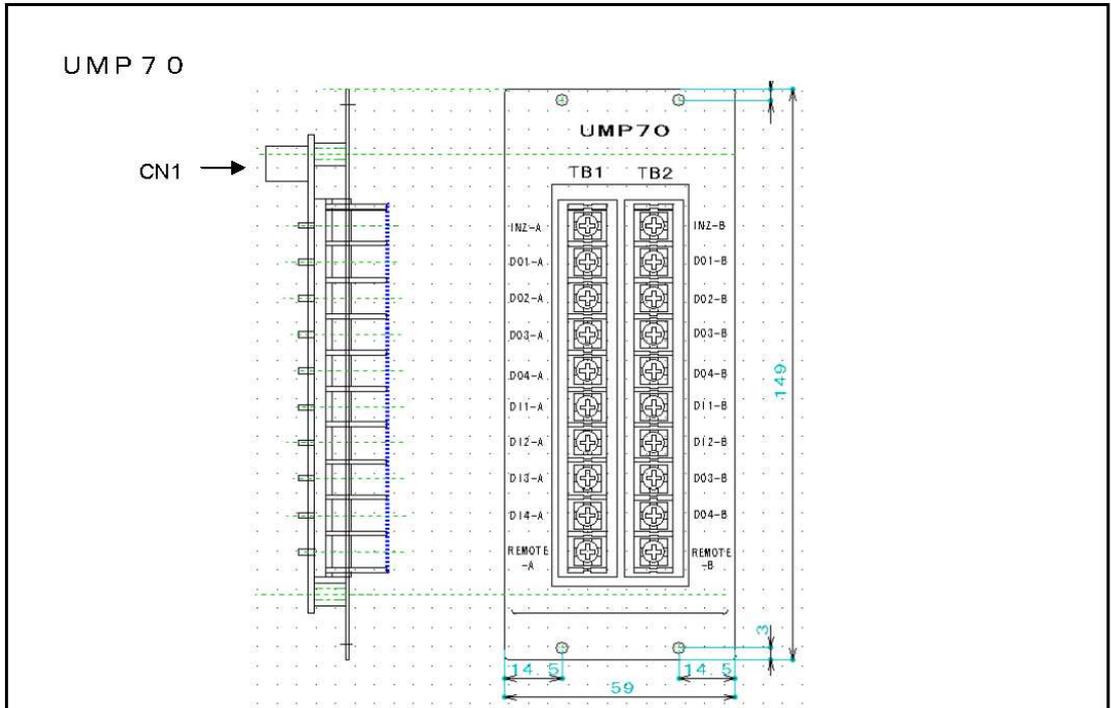

結線図

CN	ピン番号	接続	CN	ピン番号
CN1	INZ-A	1 ⇔	TB1	1
	D01-A	2 ⇔		2
	D02-A	3 ⇔		3
	D03-A	4 ⇔		4
	D04-A	5 ⇔		5
	DI1-A	6 ⇔		6
	DI2-A	7 ⇔		7
	DI3-A	8 ⇔		8
	DI4-A	9 ⇔		9
	REMOTE-A	19 ⇔		10
	INZ-B	10 ⇔	TB2	1
	D01-B	11 ⇔		2
	D02-B	12 ⇔		3
	D03-B	13 ⇔		4
	D04-B	14 ⇔		5
	DI1-B	15 ⇔		6
	DI2-B	16 ⇔		7
	DI3-B	17 ⇔		8
	DI4-B	18 ⇔		9
	REMOTE-B	20 ⇔		10

中継コネクタ(UMP70)外形図

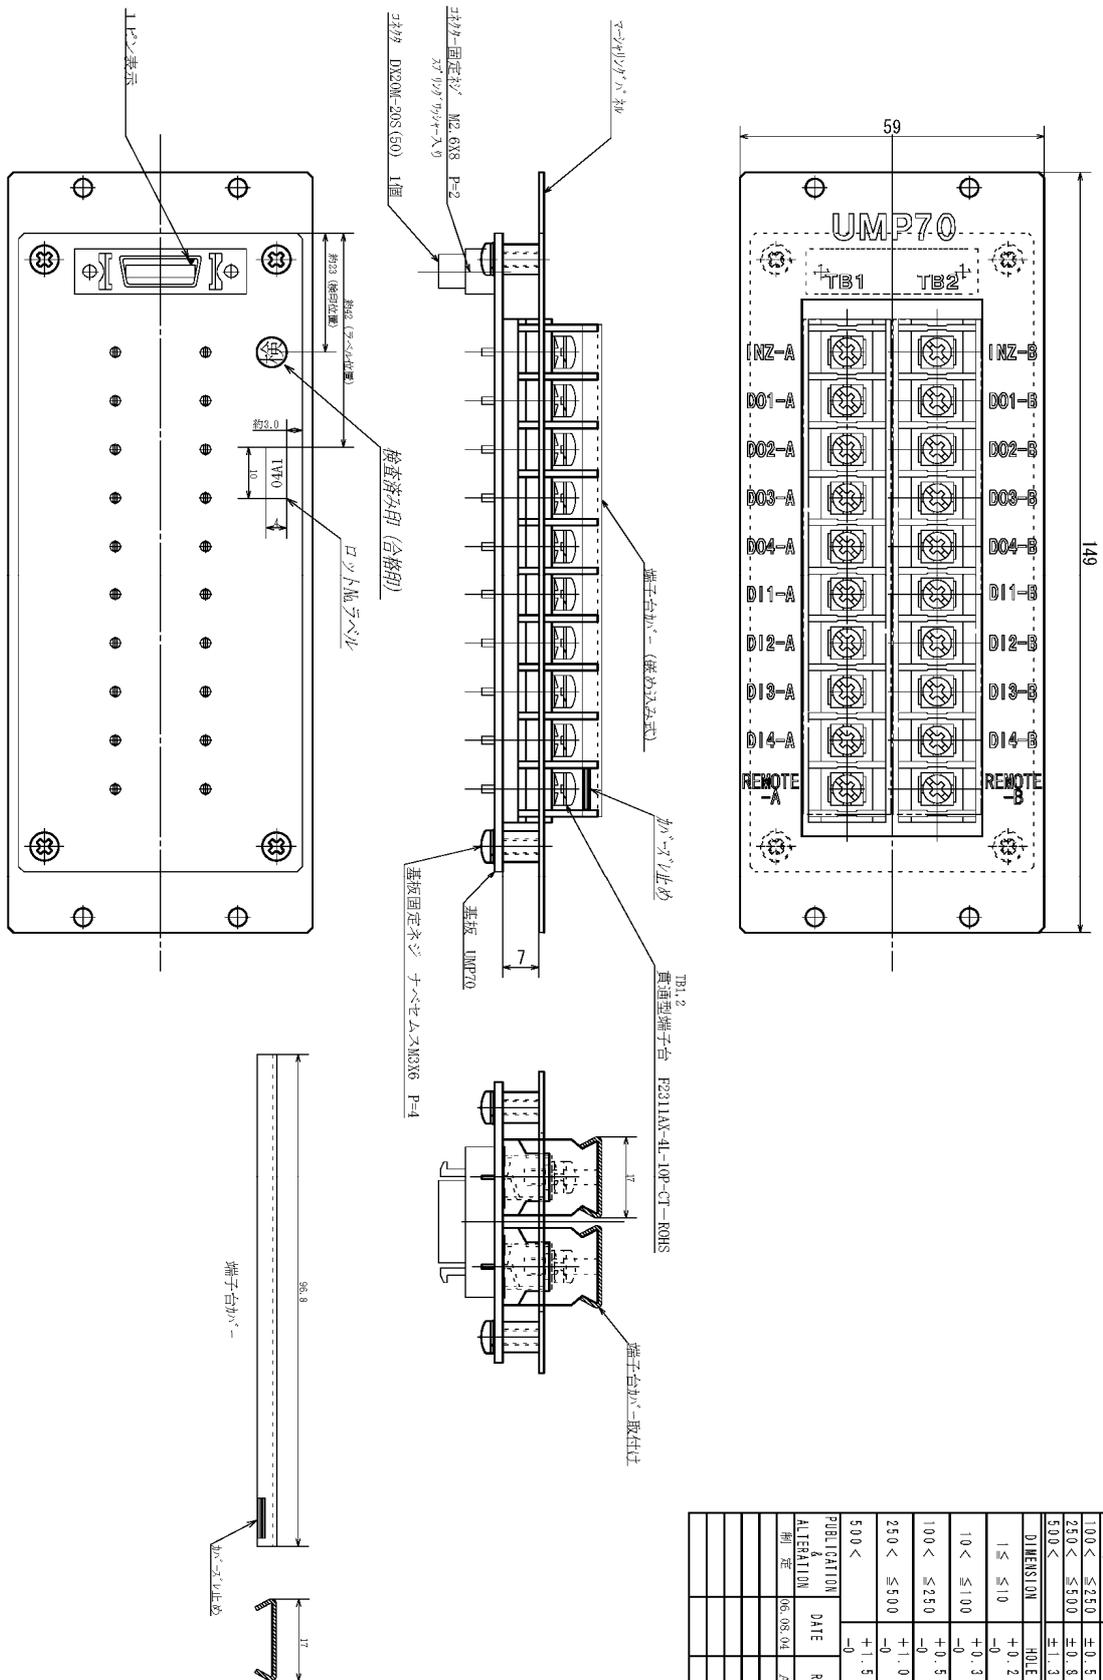

半田 P b71- (S n-3.0A g-0.5C u)仕様

GENERAL TOLERANCE(MACHINING)			
DIMENSION	U/V/H 表示	公差	注記
	BOTH CUT	SINGLE CUT	
1 ≤ ϕ1.0	±0.2	±0.3	
1.0 < ϕ1.00	±0.3	±0.5	
1.00 < ϕ2.50	±0.5	±0.8	
2.50 < ϕ5.00	±0.8	±1.3	
5.00 < ϕ	±1.3	±2.1	
DIMENSION	HOLE	SHAFT	
1 ≤ ϕ1.0	+0.2	+0	-0.2
1.0 < ϕ1.00	+0.3	+0	-0.3
1.00 < ϕ2.50	+0.5	+0	-0.5
2.50 < ϕ5.00	+1.0	+0	-1.0
5.00 < ϕ	+1.5	+0	-1.5
PUBLICATION	DATE	REV.	MARK
編定	06.08.04	A	加藤