

TOSHIBA

Currency Packaging Machine



FS-P70



Type I / FS-P70


FS-810

Currency Processing System of
Currency Processing Machine FS-810 and
Currency Packaging Machine FS-P70.

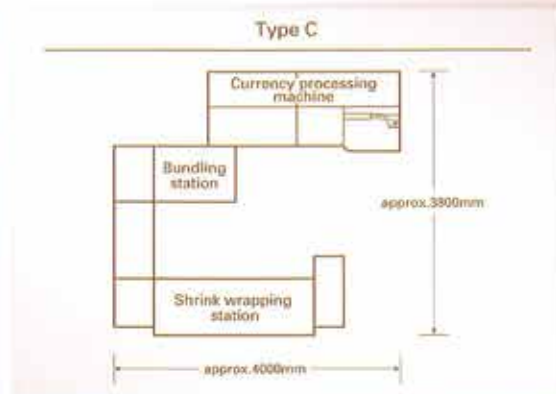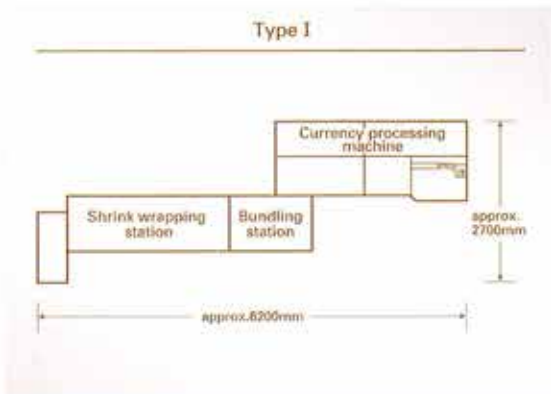


Compact & Flexible layout according to the size of the operating room

Efficient and Secure Banknote Post - Processing

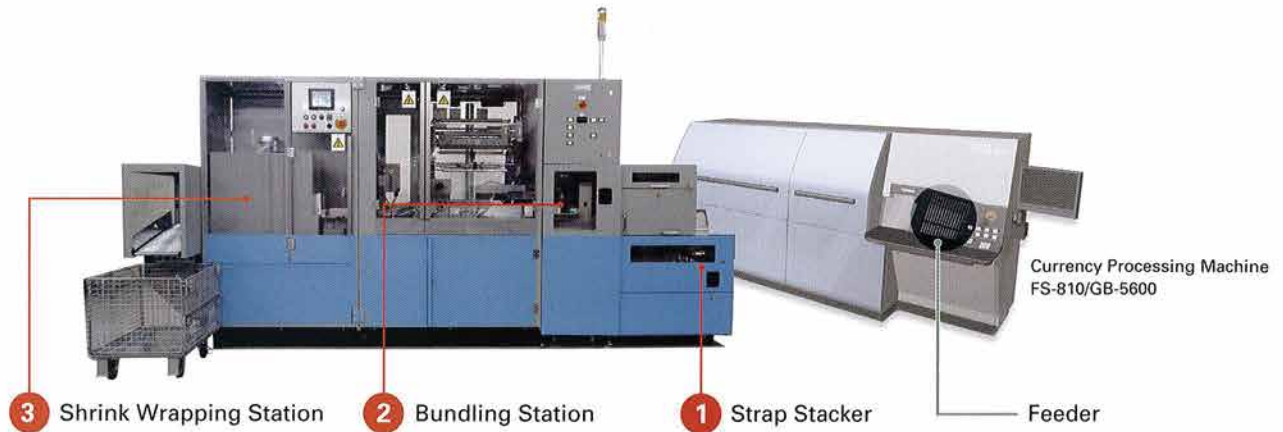

Feeding by Loose Banknotes - Collecting by Sealed Package

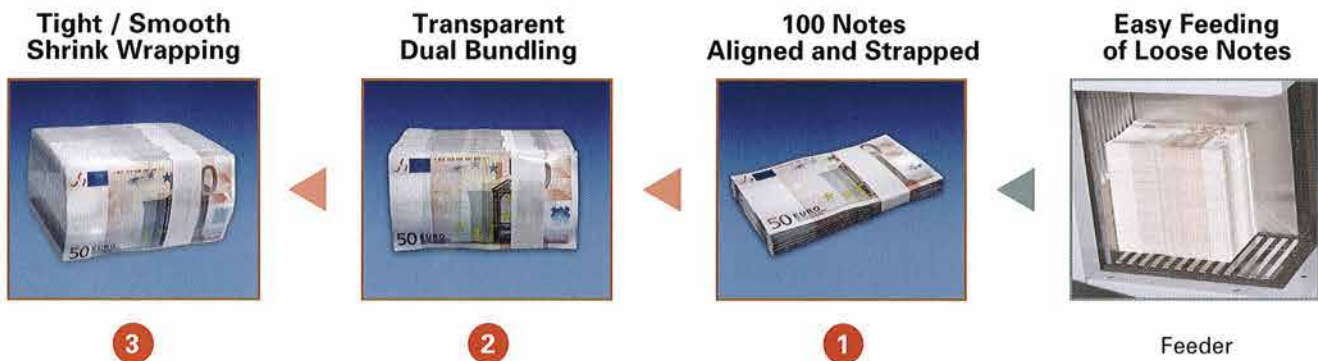

Unique and Useful Function

Dual Strap Stackers

Dual strap stackers make it possible to package two different note categories sorted separately by the currency processing machine.

Shrink - Wrap Film Scrap Free

A special cutting method eliminates the need for removal and disposal of the shrink-wrap film, both reducing costs and being good for the environment.

Straps Buffer Storage

The straps buffer storage of the packaging machine allows the currency processing machine to continue to feed notes until the current batch is finished even if a jam occurs in the packaging machine itself.

Manual Operation

Straps can be introduced manually to the packaging machine. The number of straps introduced to the packaging machine can be checked and displayed even during manual input.

Specification

Machine Size (approx.)	H:1750mm W:3840mm D:855mm	Bundle Material	OPP tape
Mass	approx.1350kg (for Type-I)	Type of Foil	Polyolefin film
Power Supply	3 phase(5wires)/ AC400V/ 50Hz	Approval	CE
Air Supply	0.6-0.8MPa, compressed, dry, oil-free	Power Consumption	approx.8kVA (without external air supply unit)
Temperature	15-30°C	Option	Offline labeler
Humidity	40-80%RH		Compact compressor with low noise

Corresponding currency processing machine : TOSHIBA currency processing machine FS-810, GB-5600 etc.

Note: All specifications are subject to change without prior notice.

Note: When using FS-P70, please be sure to read the instruction manual carefully to ensure correct equipment usage.

TOSHIBA INFRASTRUCTURE SYSTEMS & SOLUTIONS CORPORATION

Security & Automation Systems Division

72-34, Horikawa-cho, Saiwai-ku, Kawasaki-shi 212-8585, Japan

Tel: +81-44-331-1686 Fax: +81-44-548-9552

<http://www.toshiba.co.jp/sis/en/scd/bank/bank.htm>

© 2017 Toshiba Infrastructure Systems & Solutions Corporation